


BBX

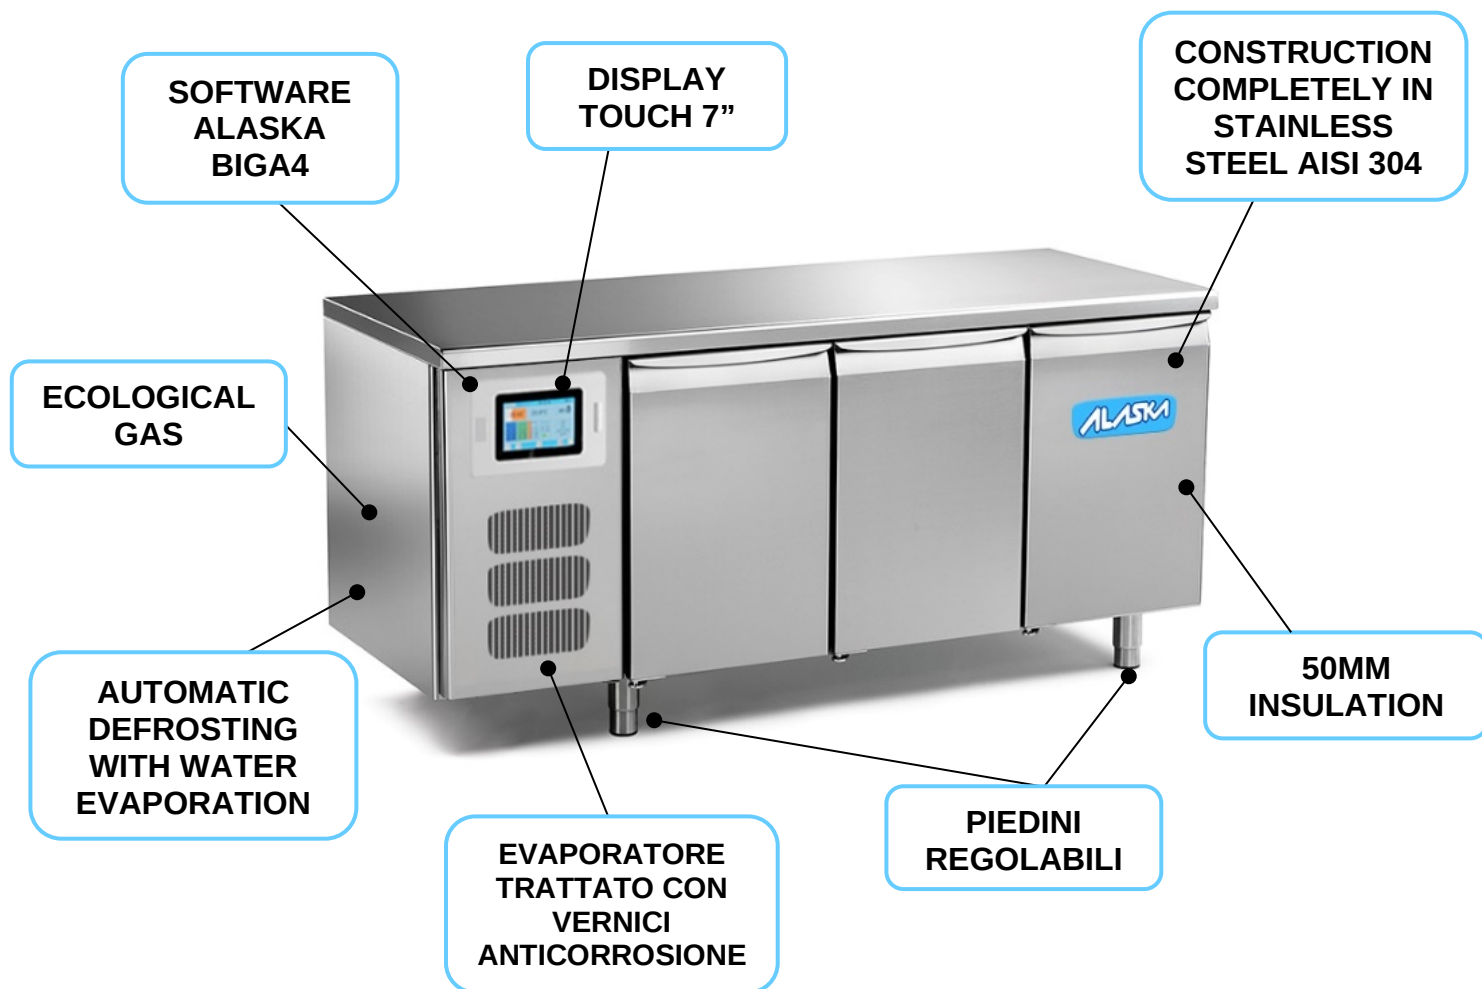

Compartment equipment:

- N°1 pair of guides + N°1 plastic-coated grid

Optional:

- Reversible ports
- Different frequencies and/or voltages
- Humidifier
- Ready for Industry 4.0

SOFTWARE ALASKA

BIGA4



TECHNICAL DATA

BX 20

BX 30

BX 40

Number of doors	N°	2	3	4
Temperature	°C	-5/+40		
Dimensions without top (LxPxH)	mm	1456X750x810	1984X750x810	2512X750x810
Dimensions with top (LxPxH)	mm	1456X750x850	1984X750x850	2512X750x850
Dimensions with top with upstand (LxPxH)	mm	1456X750x950	1984X750x950	2512X750x950
Depth with 90° door	mm	1230		
Inner depth	mm	640		
Insulation thickness	mm	50		
Plastic container capacity cm 60x40x27(h)	N°	4	6	8
Refrigerant Gas	R290			
Power supply	V/~Hz	230/1F/50		
Power plug type	Schuko plug			
Max electric power	W	1250	1300	1300
Max current consumption	A	5,0	5,6	5,6
Defrosting type	Elettrico			
Pallet packaging dimensions (LxPxH)	mm	1520x850x1110	2050x850x1110	2580x850x1110
Net Weight	Kg	140	190	230
Pallet gross weight	Kg	160	210	250

The characteristics given are only indicative. ALASKA reserves the right to make any changes it deems necessary without prior notice. The total and/or partial reproduction of this document is PROHIBITED. Violators will be prosecuted according to the law.